


Prestige Elite Antique



Notified Body 0497
n°1765/07

General description: asphalt shingle with prepatinated copper

Descriere generala: sindrila bituminoasa cu foita de cupru prepatinat

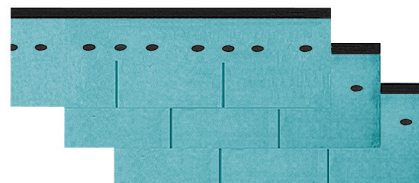

bituminous compound / compound bituminos	-		Blown bitumen	
length / lungime	EN 544	mm	1000	+/-3
width / latime	EN 544	mm	340	+/-3
thickness / grosime	-	mm	4,7	+/-10%
exposed area / suprafata expusa	-	mm	145	-
copper thickness / grosime foita de cupru	-	µm	70	+/-3

Physical-chemical properties / Proprietati fizico-chimice

weight / greutate	-	kg/m ²	16,6	+/-8%
mass of the fibreglass mat / masa fibra de sticla	-	g/m ²	2*80	+/-10%
bitumen single layer / bitum per strat	EN 544	g/m ²	>3400	-
mechanical resistance MD/CMD /rezistenta mecanica	EN 544	%	1500/1500	+/-15%
nail resistance / rezistenta la strapungere	EN 544	N	>200	-
peeling / exfoliere	EN 544	N/cm	>5	-

Fire behaviour / Comportamentul la foc

classification according / conform normei	EN 13501-5	B roof (t1)
classification according / conform normei	EN 13501-1	C s2 d0

Wrapping / Ambalaj

type / tip	cartboard / carton
shingles for bundle/ placi per pachet	14
m ² /bundle / mp per pachet	2,03
m ² /pallet/ mp per palet	97,44

Further info about company, product and roofing instruction on web site www.tegolacandese.com
Pentru mai multe informatii despre companie, produse si informatii tehnice, accesati www.tegola.ro

Tegola Romania SRL
Sos.Pogonele, nr.18, Buzau
Tel. +40 238 718181 - Fax +40 238719191
e-mail: office@tegola.ro

TEGOLA[®]
CANADESE

Company certified according quality system ISO 9001 and environmental system ISO14001